




Unrestricted airflow		1400 m ³ /h (FAN 14) 2400 m ³ /h (FAN 28)
Power consumption		0,55 kW (FAN 14) 0,75 kW (FAN 28)
Motor speed		1400 rpm (FAN 14) 2800 rpm (FAN 28)
Connection diameter		160 mm
Fan wheel	(1)	concave
Max. noise level		58 dB(A) (FAN 14) 69 dB(A) (FAN 28)
Max. pressure		400 Pa (FAN 14) 1700 Pa (FAN 28)
Non return valve		option
Net weight		14 kg (FAN 14) 15 kg (FAN 28)
Available power supply		400V/3ph, 230V/3ph, 230V/1ph, 115V/1ph 50 and 60 Hz
Suitable extraction arm type		T-Flex (FAN 14 and 28); (Ultra)Flex 3 and 4 (FAN 28)

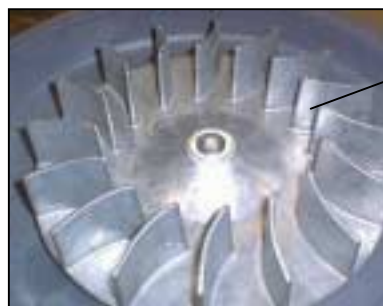

1